

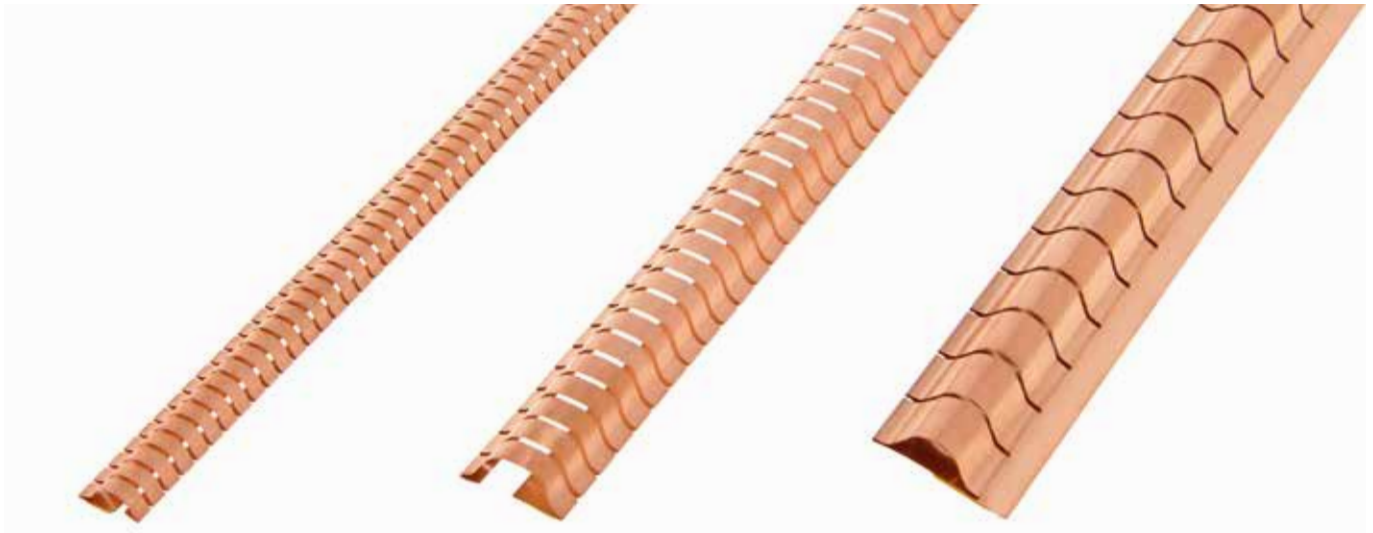


# STICK-ON MOUNTING FINGERSTRIP 2330

Stick-on mounting finger stock gaskets with pressure sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications and gaps from 3 to 6 mm

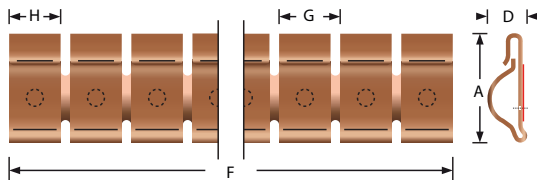


## STICK-ON 2332

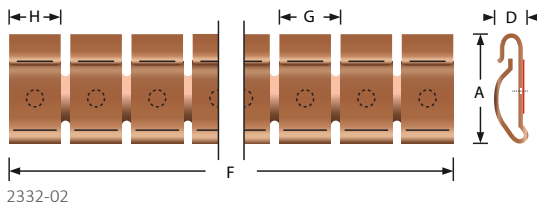


Part nr.	A	D	F	G	H	Material thickness
2332-02	9.7	3.2	406	4.8	4.3	0.07mm
2332-05	19.3	5.8	609	9.5	8.8	0.10mm

## STICK-ON 2335

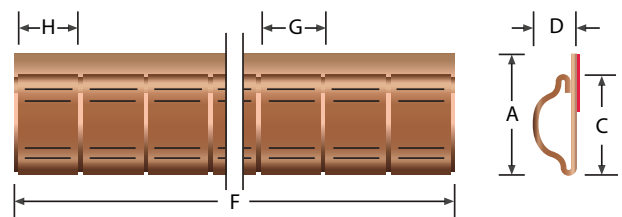


Part nr.	A	C	D	F	G	H	Material thickness
2335-01	19.8	15.2	5.6	456	9.5	8.7	0.09mm

## STICK-ON 2336

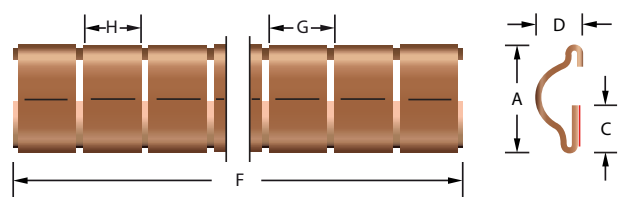


Part nr.	A	C	D	F	G	H	Material thickness
2336-04	15.2	7.4	5.6	457	9.5	8.7	0.09mm

## STICK-ON 2334

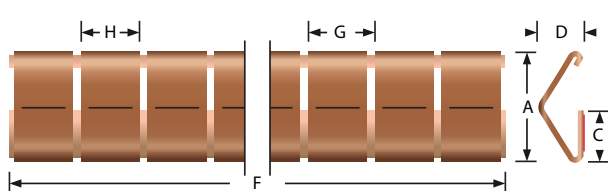

Part nr.	A	C	D	F	G	H	Material thickness
2334-01	8.1	5.3	2.8	408	4.8	4.3	0.05mm
2334-04	9.4	5.3	3.3	406	6.4	5.7	0.05mm

## STICK-ON 2338

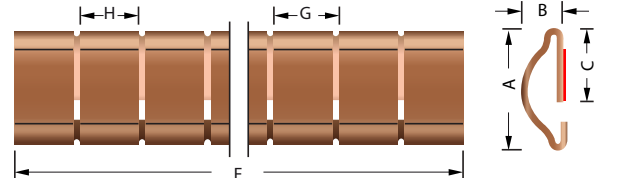

Part nr.	A	C	D	F	G	H	Material thickness
2338-01	8.1	4.8	2.5	406	4.0	3.5	0.10mm
2338-02	8.1	4.8	2.5	406	4.8	3.5	0.10mm
2338-03	9.4	4.8	3.3	406	6.4	5.7	0.10mm
2338-04	9.4	4.8	3.3	406	3.2	2.8	0.10mm
2338-05	15.3	4.8	5.6	457	9.5	8.7	0.10mm
2338-06	15.3	4.8	5.6	457	4.8	4.2	0.10mm

Material: Beryllium copper

## ORDER EXAMPLE

Part number	Adhesive
Specify the part number that you need from the table	<ul style="list-style-type: none"> <li>1 : Standard adhesive</li> <li>2 : Conductive Self-adhesive</li> <li>3 : No adhesive</li> </ul>